



MOLECULAR PROPERTY SPECTROMETER™ (MPS™) HAZARDOUS LOCATIONS USER GUIDE

Notices

SM-UM-0003-C10

Copyright © 2019-2021 Nevada Nanotech Systems Inc. All rights reserved.

1395 Greg Street, Suite 102

Sparks, Nevada 89431

All Rights Reserved

This publication is protected by copyright and all rights are reserved. No part of it may be reproduced or transmitted by any means or in any form, without prior consent in writing from NevadaNano.

The information in this document has been carefully checked and is believed to be accurate. However, changes are made periodically. These changes are incorporated in the newer publication editions. NevadaNano may improve and/or change products described in this publication at any time. Due to continuing system improvements, NevadaNano is not responsible for inaccurate information which may appear in this manual. For the latest product updates, consult the NevadaNano web site at www.nevadanano.com. In no event will NevadaNano be liable for direct, indirect, special exemplary, incidental, or consequential damages resulting from any defect or omission in this document, even if advised of the possibility of such damages.

In the interest of continued product development, NevadaNano reserves the right to make improvements in this document and the products it describes at any time, without notices or obligation.

The Molecule logo is a trademark of Nevada Nanotech Systems Inc. Use of the logos for commercial purposes without the prior written permission of NevadaNano may constitute trademark infringement and unfair competition in violation of federal and state laws.

NevadaNano, the Molecule logo, Molecular Property Spectrometer, and MPS are trademarks of Nevada Nanotech Systems Inc.

Other trademarks and trade names may be used in the document to refer to either the entities claiming the marks and names or their products. Nevada Nanotech Systems Inc. disclaims any proprietary interest in trademarks and trade names other than its own.



Please Recycle

Shipping materials are recyclable. Please save them for later use, or dispose of them appropriately.

1. Product Approval






1.1. The following Molecular Property Spectrometer™ (MPS™) gas sensors fall within the scope of the product approval table shown below:

MPSaaa-S403dd-Ef MPSaaa-S404dd-Ef MPSaaa-S405dd-Ef
 MPSaaa-S423dd-Ef MPSaaa-S424dd-Ef MPSaaa-S425dd-Ef

where placeholders "aaa", "dd", and "f" can be any alphanumeric combination.

1.2. Additional certifications exist beyond those displayed in the product approval table shown below. Please consult NevadaNano for additional certifications.

1.3. System integrators are responsible to confirm current status of certifications by visiting the appropriate certification body website and contacting NevadaNano where appropriate.

Certification Body		 ATEX NB 2809 UKEX AB 1725	
Test Standard	IEC 60079-0:2017 IEC 60079-11:2011	EN 60079-0:2018 EN 60079-11:2012	FM 3600:2018 FM 3610:2018 ANSI/UL 913:2019
Protection Categories	Ex ia IIC Ga Ex ia IIIC Da Ta = -40°C to 75°C	 II 1 G Ex ia IIC Ga  II 1 D Ex ia IIIC Da Ta = -40°C to 75°C	Class I, Division 1, Group A,B,C,D Class II and III, Division 1, Group E,F,G Class I, Zone 0 AEx ia IIC Ga Zone 20 AEx ia IIIC Da Ta = -40°C to 75°C
Certificate	IECEX FMG 19.0028U	FM19ATEX0184U FM21UKEX0159U	FM19US0145U FM19CA0077U

2. Integration Guidelines


- 2.1. The Molecular Property Spectrometer™ (MPS™) has been approved as component-type piece of equipment and therefore may not be used as a standalone unit in hazardous locations.
- 2.2. The sensor may be used with combustible gases with apparatus groups IIA, IIB and IIC and with temperature classifications T1, T2, T3, and T4. It may also be used in dust atmospheres IIIA, IIIB, and IIIC with temperature classifications greater than or equal to T135C.
 - 2.2.1. For all temperature classifications, this component is certified for use in ambient temperatures of -40°C to +75°C.
- 2.3. The MPS™ gas sensors within the scope of the product approval section have been assessed under mass-fault conditions with the resulting entity parameters:
 - 2.3.1. These entity parameters are only valid for linear power sources.
 - 2.3.2. The Ci and Li values indicated in the entity parameters must be included in the entity parameters of the overall system in which the sensors are installed.

MPS™ gas sensors	Pi	Ui	Ii	Ci	Li
MPSaaa-S403dd-Ef MPSaaa-S404dd-Ef MPSaaa-S405dd-Ef	870 mW	6 V	1.8 A	19.5 µF	0
MPSaaa-S423dd-Ef MPSaaa-S424dd-Ef MPSaaa-S425dd-Ef	870 mW	6 V	1.8 A	8.3 µF	0

- 2.4. Installation and inspection of the MPS™ sensor unit should be carried out by personnel familiar with applicable codes pertaining to explosive atmospheres.
- 2.5. There are no serviceable parts in the MPS™.
- 2.6. Confirmation of baseline sensor performance shall be conducted in firmware using the built-in self-test protocol supplied by NevadaNano.
- 2.7. When standard operating procedures require sensor calibration, the end user may confirm adequate performance with a sensor validation test. Gases approved by NevadaNano shall only be used.

3. Critical Dimensions

3.1. Dimensions are in millimeters (mm).

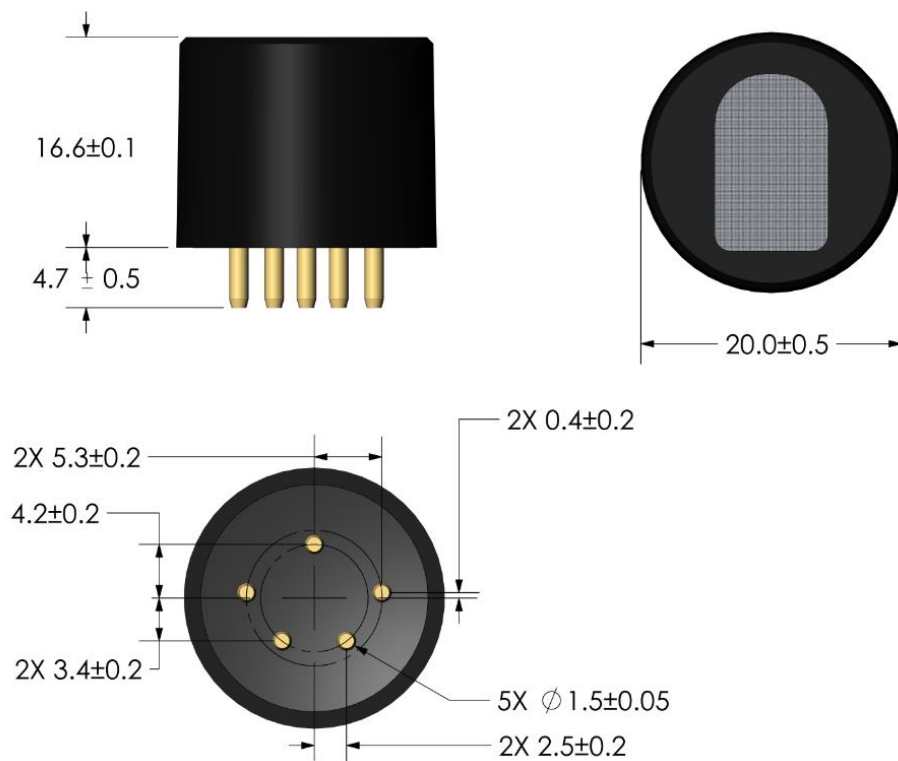

4. Schedule of Limitations

- 4.1. The functionality of the sensor shall be verified as necessary in accordance with the appropriate performance standard.
- 4.2. The MPS™ is approved for an installation with minimum ingress protection rating of IP20. It is the responsibility of the system integrator to design the end-product for conditions that exceed the aforementioned enclosure rating.
- 4.3. The intrinsically safe parameters for the sensor shall be applied to the intrinsically safe device to which the sensor is connected.



Nevada Nanotech Systems Inc.
1395 Greg Street, Suite 102
Sparks, Nevada 89431
United States
Tel: +1 775 972 8943
Fax: +1 775 972 8078
info@nevedanano.com
www.nevedanano.com